

SWITCHES
AND
SOCKETS

L I S S E



Schneider
Electric

LIFE

ISON

Your home is more than four walls; it is a living, breathing space.

The sanctuary where your journey unfolds and evolves.

A place for every mood and any occasion.

Your home is full of life, love, laughter, family, friends and fun.

We help adapt your home to the rhythm of your life.

We provide ingeniously designed solutions to enhance your life.

We create technology that brings your home to life.



GGBL1012

Curves in all the right places...

The Lisse white moulded range of wiring accessories offers the perfect blend of style and performance.

You no longer have to choose between convenience and efficiency, or compromise on appearance to get the most innovative features. Lisse is packed with a vast array of technical features, providing a high level of quality, reliability and value you can count on.

- Ideally suited for new construction and refurbishment projects
- Future-proofed to cater for the latest demands in consumer technology
- Made from durable, high quality urea with antimicrobial properties
- Cleverly designed to ensure that product ordering is simple and efficient, with many time and space saving solutions
- Crafted with your customer in mind, adding bespoke solutions to make a lasting impact

From all angles.

No matter how you look at it - from the front, back, or side - the Lisse range is designed to make your life simpler. Get installation right the first time, every time.


Backed out and captive screw terminals to allow for positive drive and speed of installation

Twin earth terminals on all 2 gang 13A socket outlets, for high integrity earthing


Angled terminals for easier access

Light grey back moulding colour for easier terminal identification

Cable markings on all products with a moulded template to check the wire length

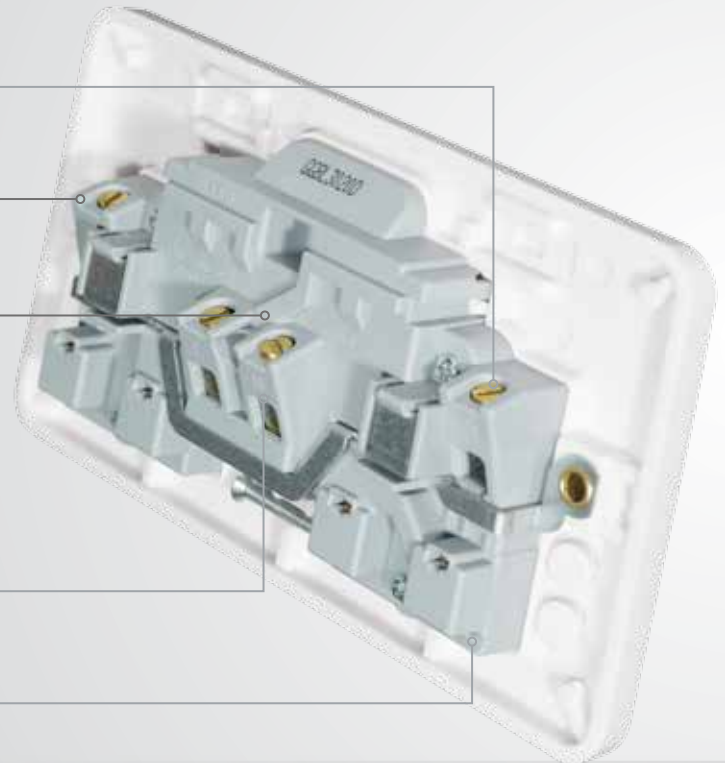

Minimum back projection frees up space in the back box for cabling

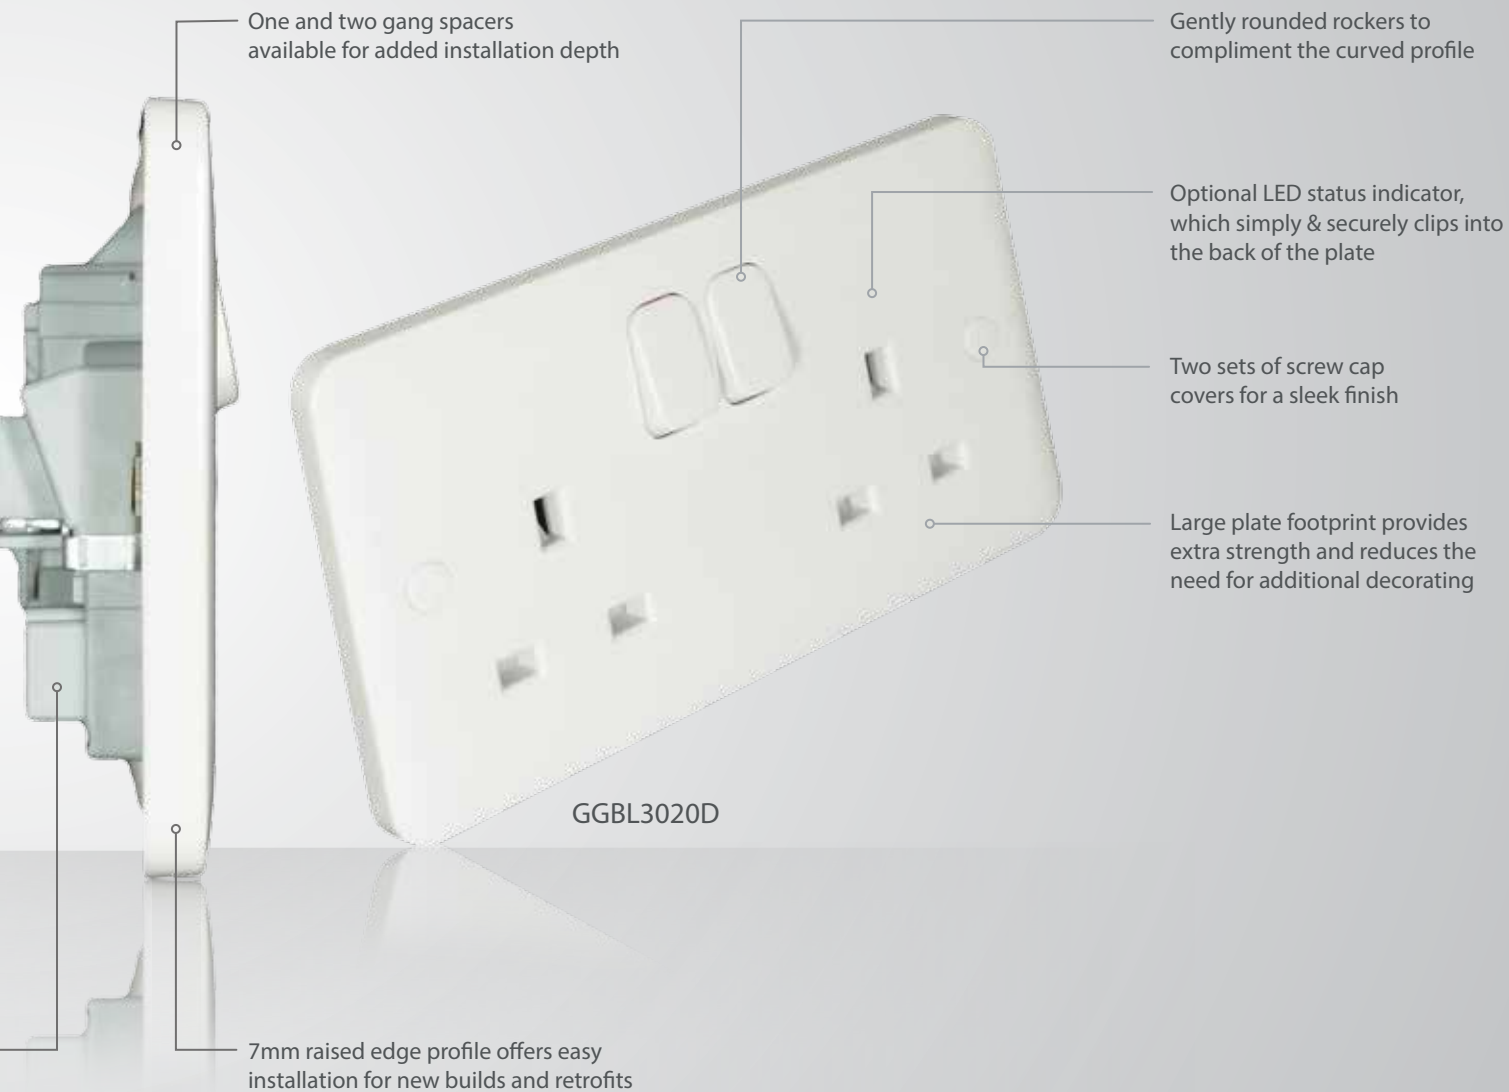

Tailored to meet your needs...

Lisse has been cleverly designed to ensure that product ordering is simple and efficient, with many time and space saving solutions.

With indication or without? With flex outlet or without? Lisse simplifies the decision with standard, core part references and optional adaptations to suit individual installation requirements. What does this mean for you? Faster ordering, fewer part references, and greater flexibility for future upgrades.



GGBL2010

A tidy solution

Optional LED status indicators and flex outlet frames offer the flexibility you need on site and in the warehouse, without having to hold stock variations of the same product. This also ensures you always have the right product, exactly when you need it.



GGBL5010,
GGBLSPC1FO

More space

Off to your next remodel or refurbishment? Avoid the time and cost needed to replace old back boxes for your new accessories. One and two gang spacers provide the perfect solution when extra installation depth is needed.



GGBL3020, GGBLSHF2GS

Wiring accessories become home accessories

The Lisse range includes several exclusive accessories that help to make your customer's lives simpler, convenient, and fun! Recharging mobile phones or tablets is made easy with the 2 gang shelf frame for Lisse sockets. Plus, they will never lose their keys or shopping lists again with Lisse hook or clip frames.



Neutral Loop Terminal for lighting connections...



GGBL1012
GGBL6012CS

Future-proof your installation thanks to the neutral loop terminal design in every Lisse plate switch

The addition of a neutral loop terminal in Lisse light switches ensures that every installation offers an efficient and installer-friendly solution for applications with decorative ceiling roses, intelligent lighting or other upgraded technologies that would normally require a neutral connection at the switch. Therefore, wiring that would normally occur in the ceiling can now take place at the switch, eliminating the need for a separate terminal block.

This feature makes the wiring connection more convenient and accessible for inspection, while also allowing your installation to be future-proofed to accommodate any later adjustments in the wiring configuration as your customer's needs change.



Simply beautiful

The smooth, modern lines of Lisse offer an understated elegance to compliment today's interiors. Not only that - every attention to detail has been paid to the design and construction, ensuring the range is built to make your installation faster, smoother, simpler...

Illuminating...

Enjoy the subtle but elegant illumination provided by Lisse LED indicators. This optional feature shines through the front plate moulding when additional location or power indication is needed. With its LED technology, you also can feel confident in the performance and longevity

Plug and play

Installation couldn't be easier or more flexible, as the LED indicators are simply clipped in to place via a purpose-built holding space on the back of the front plate and connected using the dedicated terminals.



GGBL2011



Extended range

for bespoke requirements

With such a comprehensive product range, Lisse white moulded allows you to find everything that you need to meet the demands of today's modern installations.



GGBL6012LS

Dimming capability.

Enjoy a comprehensive selection of dimming solutions with Lisse white moulded, from mains & low voltage through to LED compatibility, as well as the addition of 1-10V (400W & 1000W) control.



GGBL70746110

Stay connected.

Help your customers stay connected to their TVs, game consoles, computers and sound systems with Lisse.

Choose from a full range of multimedia connectors, USB chargers and combination plates to meet all of your customers' needs.

For every application.

From commercial offices and hotels to residential spaces, Lisse white moulded offers solutions ideally suited to the unique requirements of each installation.



Non-standard plug and socket

In communal spaces where energy access needs to be controlled, the Lisse non-standard socket and accompanying plug offer the ideal solution



Improving ease of use

Wide rocker switches and socket outlets with outboard rockers from the Lisse portfolio offer a practical alternative to improve the ease of operation



Added safety and security

Provide peace of mind to a commercial installation or communal space with a lockable switch or socket, as unauthorised energy usage can be restricted



A full clinical assessment

Schneider Electric have commissioned an external test to assess the **resistance of Lisse white moulded wiring devices** against:

- > MRSA
- > E-Coli
- > Samonella
- > Klebsiella Penumoniae

Combined with the Schneider Electric cable management range, to provide you with a complete solution.

Lisse wiring devices can be used seamlessly with the Ultimate or Cableline anti-microbial 3 compartment trunking system.



GGBL3050

The results:

MRSA	99.9% kill rate
E-Coli	97.5% kill rate
Salmonella	97.0% kill rate
Klebsiella Pneumoniae	99.4% kill rate

Clear, useful packaging.

Lisse packaging is offered in both point-of-sale and wholesale options. Each option offers clear product information and descriptions, helping to minimise errors when preparing orders.



Point-of-sale / display packaging

- Clear descriptions, highlights and pictograms to inform and aid purchasing decisions
- Product reference easily identifiable
- Unobstructed view of front and back of product
- All part numbers with S suffix have display packaging



Wholesale packaging

- Optimal dimensions for standard shelves to optimize use of shelf space
- Securely packaged to prevent movement inside the box
- Large, visible labels
- Easy to read in environments with low light levels


Easy to understand part codes.

Simple ideas...

Provide your customers the style and performance that they are looking for, whilst enjoying easier ordering with the Lisse range. Part codes follow a standard, straight forward methodology to save you time.

...with a simple part code structure

10	Plate switches
20	20AX switches & flex outlets
30	Sockets
40	50A switches & 45A control units
50	Fused connection units
60	Dimmers
70	Shaver sockets & data communication
80	Blank plates

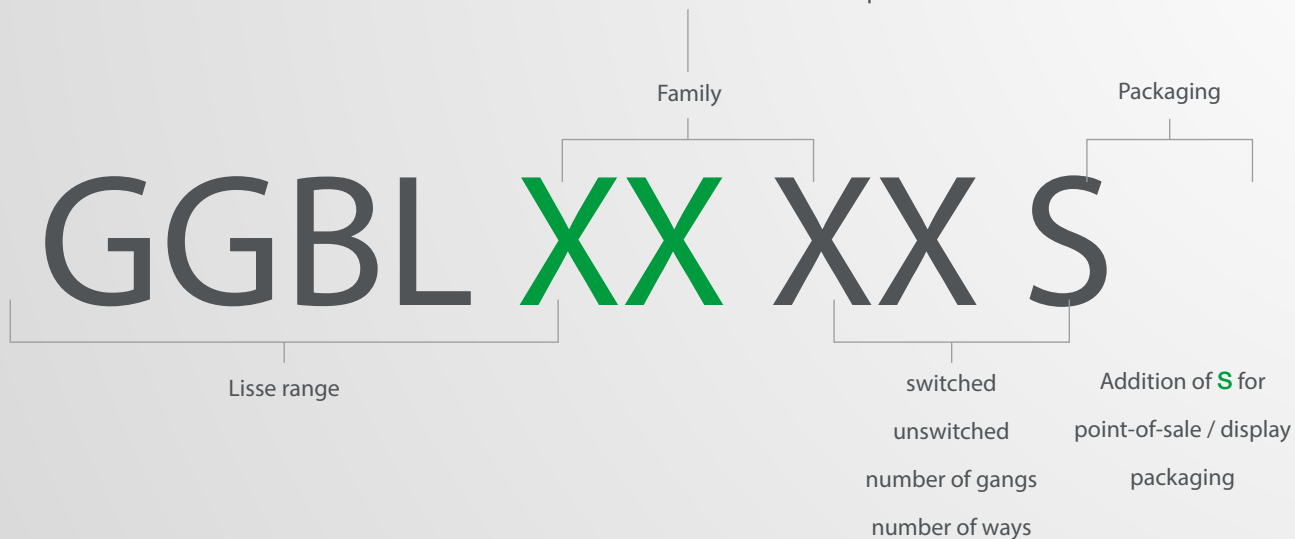

Lisse Range

White Moulded




GGBL3010NIS - GGBL3010DS



GGBL3020NIS - GGBL3020DS



GGBL3050S



GGBL30212DS



GGBL3030S



GGBL3050NS



GGBL3060LS



GGBL3060S



GGBL3081S



GGBL3090S



GGBL3010EUS



GGBL3050EUS



GGBL3060EUS

13 A socket outlets

- Dimensions: 87 x 87 mm (1 gang), 87 x 148.5 mm (2 gang)
- Fix screws: M3.5 x 25 mm
- BS 1363
- BS 5733 and BS EN 60950 for GGBL30201USBS

Part number	Description	Qty
GGBL3010NIS ⁽¹⁾	1 gang switched	10
GGBL3010DS ⁽¹⁾	1 gang DP switched	10
GGBL3020NIS ⁽¹⁾	2 gang switched	5
GGBL30201USBS ⁽²⁾	2 gang switch with USB charger	1
GGBL3020DS ⁽¹⁾	2 gang DP switched	5
GGBL30212DS	1 to 2 gang convertor switched	1
GGBL3030S ⁽¹⁾	2 gang DP switched with outboard rockers	5
GGBL3050S	1 gang unswitched	10
GGBL3050NS ⁽¹⁾	1 gang switched, non-standard earth	10
GGBL3060S	2 gang unswitched	5
GGBL3060LS ⁽¹⁾⁽²⁾	1 gang lockable	5

⁽¹⁾ this items can be fitted with a LED indicator ref. GGBLSIND

⁽²⁾ available from september 2015

Round pin socket outlets

- Dimensions: 87 x 87 mm
- Fix screws: M3.5 x 25 mm
- BS 546

Part number	Description	Qty
GGBL3081S ⁽¹⁾	1 gang 5 A switched	1
GGBL3090S ⁽¹⁾	1 gang 15 A switched	10

⁽¹⁾ this items can be fitted with a LED indicator ref. GGBLSIND

10 A universal socket outlets

- Dimensions: 87 x 87 mm
- Fix screws: M3.5 x 25 mm
- IEC 60884-1 / BS 5733
- Not use for UK

Part number	Description	Qty
GGBL3010EUS	10 A 1 gang unswitched Euro/US	1
GGBL3050EUS	10 A 1 gang switched Euro/US	1
GGBL3060EUS ⁽¹⁾	10 A 2 gang unswitched Euro/US	1

⁽¹⁾ this item can be fitted with a LED indicator ref. GGBLSIND



GGBL3016A1



GGBL1011NIS - GGBL1012NIS
GGBL101220S - GGBL1012RS
GGBL1014S



GGBL1012RBS



GGBL1012RPS



GGBL1013S



GGBL1022INS - GGBL102220S



GGBL1032INS



GGBL1042S



GGBL1012WS - GGBL1014WS



GGBL1022WS



GGBL1032WS

16 A Schuko socket outlet

- Dimensions: 87 x 87 mm
- Fix screws: M3.5 x 25 mm
- IEC 60884-1
- Not for UK use

Cat. no.	Description	Qty
GGBL3016A1 ⁽¹⁾	16 A 1 gang Schuko	10

⁽¹⁾ available from september 2015

10 AX & 20 AX plate switches

- Dimensions: 87 x 87 mm (1-3 gang), 87 x 148.5 mm (4 gang)
- Fix screws: M3.5 x 18 mm
- BS EN 60669-1
- BS EN 60947-3 (GGBL1013, GGBL1013L and GGBL1013R)

Part number	Description	Qty
GGBL1011NIS	10 AX 1 gang 1 way	10
GGBL1012NIS	10 AX 1 gang 2 way	10
GGBL101220S	20 AX 1 gang 2 way	1
GGBL1012RS	10 A 1 gang 2 way retractive	10
GGBL1012RBS	10 A 1 gang 2 way retractive, with "bell" symbol	10
GGBL1012RPS	10 A 1 gang 2 way retractive, marked "Press"	10
GGBL1013S ⁽¹⁾	10 A 3 pole isolator	10
GGBL1014S	10 AX 1 gang intermediate	10
GGBL1022NIS	10 AX 2 gang 2 way	10
GGBL102220S	20 AX 2 gang 2 way	10
GGBL1032NIS	10 AX 3 gang 2 way	10
GGBL1042S	10 AX 4 gang 2 way	5

⁽¹⁾ this items can be fitted with a LED indicator ref. GGBLSIND

10 AX wide rocker switches

- Dimensions: 87 x 87 mm
- Fix screws: M3.5 x 25 mm
- BS EN 60669-1

Part number	Description	Qty
GGBL1012WS	10 AX 1 gang 2 way	10
GGBL1014WS	10 AX 1 gang intermediate	10
GGBL1022WS	10 AX 2 gang 2 way	10
GGBL1032WS	10 AX 2 gang 2 way	10

Lisse Range

White Moulded



GGBL6011CS

Mains dimmer switches

- Dimensions: 87 x 87 mm
- Mounting box: SB161 (F) GU9116 (S)
- BS EN 60669-2-1
- Fix screws: M3.5 x 18 mm
- Leading edge control
- Not suitable for dimming LED or CFL lamps

Part number	Description	Qty
GGBL6011CS	1 gang 1 way mains 250 W	1

1-10 V dimmer switches (available from september 2015)

- Dimensions: 87 x 87 mm (1-2 gang), 87 x 148.5 mm (3-4 gang)
- Fix screws: M3.5 x 25 mm
- BS EN 60669-2-1
- Not suitable for non 1-10 V ballasts

Part number	Description	Qty
GGBL6012V4S	1 gang 2 way 1-10 V (6 A)	1
GGBL6022V4S	2 gang 2 way 1-10 V (6 A)	1
GGBL6032V4S	3 gang 2 way 1-10 V (6 A)	1
GGBL6042V4S	4 gang 2 way 1-10 V (6 A)	1

Universal dimmer switches

- Dimensions: 87 x 87 mm (1-2 gang), 87 x 148.5 mm (3-4 gang)
- Fix screws: M3.5 x 25 mm
- BS EN 60669-2-1
- Leading edge control
- Not suitable for dimming LED or CFL lamps

Part number	Description	Qty
GGBL6012CS	1 gang 2 way universal 400 W/VA	1
GGBL6022CS	2 gang 2 way universal 250 W/VA	1
GGBL6032CS	3 gang 2 way universal 250 W/VA	1
GGBL6042CS	4 gang 2 way universal 250 W/VA	1

Led dimmer switches

- Dimensions: 87 x 87 mm
- Fix screws: M3.5 x 25 mm
- BS EN 60669-2-1
- Trailing edge control
- Not suitable for Low Voltage LED lamps

Part number	Description	Qty
GGBL6012LS	1 gang 2 way universal 100 W LED	1
GGBL6022LS	2 gang 2 way universal 100 W LED	1



GGBL6012V4S



GGBL6022V4S



GGBL6032V4S



GGBL6042V4S



GGBL6012CS



GGBL6022CS



GGBL6032CS



GGBL6042CS



GGBL6012LS



GGBL6022LS

Lisse Range

White Moulded



GGBL2010S - GGBL2011S
GGBL2014WHS - GGBL4031S



GGBL2010LS



GGBL2022IMRS



GGBL2033S



GGBL5000S



GGBL5010S - GGBL5011
GGBL5013S



GGBL4011S



GGBL4021S



GGBL7090S

20 AX & 32 A DP control switches

- Dimensions: 87 x 87 mm
- Fix screws: M3.5 x 25 mm
- BS EN 60669-1

Part number	Description	Qty
GGBL2010S ⁽¹⁾	1 gang 20 AX DP	10
GGBL2010LS ⁽¹⁾⁽²⁾	1 gang 20 AX DP lockable	1
GGBL2011S	20 AX DP with LED indicator	10
GGBL2014WHS ⁽³⁾	20 AX DP with LED indicator and flex outlet marked "water heater"	10
GGBL2022IMRS	20 A DP dual control, bath/sink with LED indicator	10
GGBL4031S	1 gang 32 A DP with LED indicator	10

⁽¹⁾ this items can be fitted with a LED indicator ref. GGBLSIND

⁽²⁾ available from september 2015

⁽³⁾ ref. GGBL2014WH is supplied with flexible outlet frame and fix screws M3,5 x 30 mm

13 A fuse connection units & Flex. outlet plate

- Dimensions: 87 x 87 mm
- Fix screws: M3.5 x 25 mm
- BS 1363
- BS 5733 for GGBL2033

Part number	Description	Qty
GGBL2033S	25 A side entry Flex outlet plate	10
GGBL5000S ⁽¹⁾	13 A unswitched FCU	10
GGBL5010S ⁽¹⁾	13 A DP switched FCU	10
GGBL5011	13 A DP switched FCU with LED indicator	10
GGBL5013S ⁽¹⁾	13 A DP switched FCU with Flex outlet	1

⁽¹⁾ this items can be fitted with a LED indicator ref. GGBLSIND

⁽²⁾ ref. GGBLSPC1FO is supplied with cable clamp and fix screws M3.5 x 30 mm

50 A DP switches

- Dimensions: 87 x 87 mm (1 gang), 87 x 148.5 mm (2 gang)
- Mounting box:
- Fix screws: M3.5 x 30 mm
- BS EN 60669-1

Part number	Description	Qty
GGBL4011S	1 gang switch DP with LED indicator	5
GGBL4021S	2 gang switch DP with LED indicator	5

Shaver socket outlet

- Dimensions: 87 x 148.5 mm
- Fix screws: M3.5 x 30 mm
- BS EN 61558-2-5

Part number	Description	Qty
GGBL7090S	shaver socket 115/230 V	1

Lisse Range

White Moulded



GGBL4001S



GGBL4050S

Cooker control units

- Dimensions: 87 x 87 mm (1 gang), 87 x 148.5 mm (2 gang)
- Fix screws: M3.5 x 30 mm
- BS 4177

Part number	Description	Qty
GGBL4001S	45 A DP cooker control unit with LED indicator & 13 A switched socket	1
GGBL4050S	50 A cooker connection unit	10



GGBL7051S



GGBL7061S - GGBL7062S

Telephone outlets

- Dimensions: 87 x 87 mm
- Fix screws: M3.5 x 18 mm
- BS EN 41003

Part number	Description	Qty
GGBL7051S	1 gang RJ12 outlet	10
GGBL7061S	1 gang telephone master	10
GGBL7062S	1 gang telephone secondary	10



GGBL7071C5S - GGBL7071C6S



GGBL7072C5S - GGBL7072C6S

Data outlets

- Dimensions: 87 x 87 mm
- Fix screws: M3.5 x 18 mm
- BS EN 41003

Part number	Description	Qty
GGBL7071C5S	1 gang RJ45 cat 5e UTP outlet	10
GGBL7071C6S	1 gang RJ45 cat 6 UTP outlet	10
GGBL7072C5S	2 gang RJ45 cat 5e UTP outlet	10
GGBL7072C6S	2 gang RJ45 cat 6 UTP outlet	10

USB charger

- Dimensions: 87 x 87 mm
- Mounting box: SB351 (F) GGBL9147 (S)
- Fix screws: M3.5 x 25 mm
- BS EN 60950

Part number	Description	Qty
GGBL70042	1 gang 2 module USB charger	10

Available from september 2015

Lisse Range

White Moulded



GGBL7010 - GGBL7030S



GGBL7020S



GGBL7074S



GGBL7081S




GGBL70746110



GGBL7081456



GGBL8010S



GGBL8020S



GGBLC1GS



GGBLH1GS



GGBLSINDS



GGBLSPC1S



GGBLSPC2S

TV outlets

- Dimensions: 87 x 87 mm
- Fix screws:
 - M3.5 x 18 mm for GGBL7010 and GGBL7030
 - M3.5 x 25 mm for GGBL7020, GGBL7074 and GGBL7081

Part number	Description	Qty
GGBL7010S	1 gang TV co-axial	10
GGBL7020S	diplex outlet, TV-R/DAB	10
GGBL7030S	1 gang satellite "F" type	10
GGBL7074S	quadplex outlet, TV-R/DAB, 2 x SAT	10
GGBL7081S	triplex outlet, TV-R/DAB & SAT	10

Combined media plates

- Dimensions: 87 x 148.5 mm
- Mounting box: SB352 (F) GGBL9147 (S)
- Fix screws: M3.5 x 25 mm

Part number	Description	Qty
GGBL70746110	quadplex outlet, BT slave and TV co-axial return	5
GGBL7081456	triplex outlet & RJ45 cat 6 UTP outlet	5

Blank plates & accessories

- Dimensions: 87 x 87 mm (1 gang), 87 x 148.5 mm (2 gang)
- Fix screws: M3.5 x 18 mm (blank plates only)
- BS 5733

Part number	Description	Qty
GGBL8010S	1 gang blank plate	10
GGBL8020S	2 gang blank plate	5
GGBLC1GS	1 gang plate switch surround with clip	1
GGBLH1GS	1 gang plate switch surround with hook	1
GGBLILLS	⁽¹⁾ 1 gang illumination surround	1
GGBLSINDS	LED status indicator - red	5
GGBLSPC1S	1 gang spacer	10
GGBLSPC2S	2 gang spacer	5
GGBLSHF2GS	2 gang socket surround with shelf	1
GGBLTOP13ANS	13 A non-standard plug	20

⁽¹⁾ available from september 2015



GGBLSHF2GS



GGBLTOP13ANS

Lisse Range

White Moulded



GGBL8050



GGBL8060



GGBL8080



GUE7010W



GUE7011W



GUE7030W

Euro modular plates

- Dimensions: 87 x 87 mm (1-2 gang), 87 x 148.5 mm (4 gang)
- Refer to module for appropriate mounting box depth
- Fix screws: M3.5 x 25 mm

Part number	Description	Qty
GGBL8050	1 gang 1 module euro plate	10
GGBL8060	1 gang 2 module euro plate	10
GGBL8080	2 gang 4 module euro plate	5

Euro modules

- BS EN 41003
- BS 3041 (where applicable)

Part number	Description	Module	Qty
GUE7010W	TV/Radio diplexer	2	1
GUE7011W	Single IEC coax (female)	1	1
GUE7012W	Single IEC coax (male)	1	1
GUE7030W	Single F type sat	1	1
GUE7040W	TV/Sat diplexer	2	1
GUE7081W	TV/FM/Sat triplexer	2	1
GUE7082W	TV/FM/Sat 1/Sat 2 quadplexer	2	1
GUE7020W	HDMI	2	1
GUE7051W	RJ11 modem	1	1
GUE7061W	Telephone (BT master)	1	1
GUE7062W	Telephone (BT secondary)	1	1
GUE7071W	RJ45 CAT5e (not screened)	1	1
GUE7072W	RJ45 CAT6 (not screened)	1	1
GUE7075W	VGA	1	1
GUE7091W	LexCom Performance outlet	1	8
GUE7000W	2 x Phono socket-outlet	1	1
GUE7001W	2 x Loudspeaker socket-outlet	1	1
GUE8010W	Blank module	1	5

- Dimensions: 25 x 50 mm (single), 50 x 50 mm (double)
- Mounting box:
 - 1 module: SB251 (F) 1 gang
SB252 (F) 2 gang
 - 2 module: SB351 (F) 1 gang
SB352 (F) 2 gang

Life Is On

by Schneider Electric™

Schneider Electric FZE

E Wing, Level 4, Dubai Silicon Oasis, Emirates Road &
Dubai-Ai Ain Road Intersection
P.O. Box 341057, Dubai,
United Arab Emirates

Schneider Electric Industries SAS

35 rue Joseph Monier
92500 Rueil-Malmaison
France

Schneider Electric Limited is a company registered in England and Wales.

Registered number: 1407228. Registered office: Stafford Park 5, Telford, Shropshire TF3 3BL.

© 2015 Schneider Electric. All Rights Reserved. Schneider Electric, Make the most of your energy and Lisse are owned by Schneider Electric Industries SAS, or its affiliated companies in the United States and other countries.

As standards, specifications and designs change from time to time, please ask for confirmation of the information given in this publication.

